

The radio

V/UHF FM AMATEUR RADIO EQUIPMENT

Handheld Transceivers

Mobile Transceivers

Wide Band Receivers



144/430 MHz DUAL BAND DIGITAL TRANSCEIVER

FT1DR FT1DE


Digital C4FM Exciting New Amateur Digital Transceiver

4 Communication Modes

The FT1DR/FT1DE operates in three digital modes and an analog mode. Enjoy communication in the mode that suits each purpose.

The Automatic Mode Select (AMS) function detects the receive signal mode

The transceiver automatically selects one of the four communication modes according to the signal received. The transceiver can also be operated in a fixed communication mode.

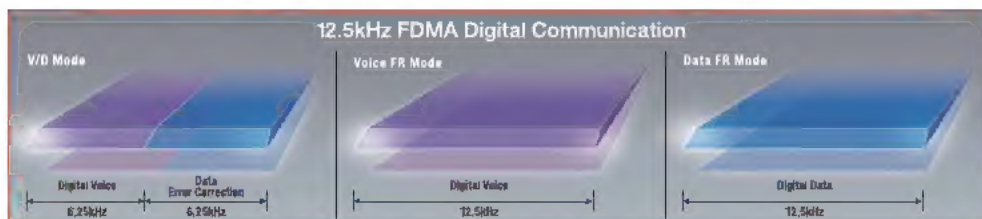

1. V/D Mode (Simultaneous Voice/Data Communication Mode)

Half of the bandwidth is used for voice signal with error correction. The transceiver uses powerful error correction technology developed for professional communication devices. The very effective error correction code provides benefits such as minimal interruption of communication. The basic digital C4FM FDMA mode provides a good balance between sound quality and error correction.

2. Voice FR Mode (Voice Full Rate Mode)

This mode uses the entire 12.5 kHz bandwidth to transmit digital voice data. The larger voice data size allows voice communication with high quality. Use this mode for pleasing sound quality communication between amateur radio friends.

3. Data FR Mode (High-speed Data Communication Mode)

This mode uses the entire 12.5 kHz bandwidth for data communication. The transceiver automatically switches to this mode when sending and receiving images, allowing a large amount of data to be transmitted quickly.

4. Analog FM Mode

Analog FM is effective for communication with a weak signal that causes voices to break up in the digital modes. The analog mode allows communication even at distances where noise and weak signals make communication almost impossible. The tried-and-trusted low-power circuit design uses less battery power than the digital modes.



SILVER



BLACK


C4FM FDMA 144/430 MHz DUAL BAND
5W DIGITAL TRANSCEIVER

FT1DR
American and Asian versions
FT1DE
European version

(7.4 V 1100 mAh Lithium Ion Battery FNB-101L and battery charger
PA-48 / SAD-11B(USA version) included)

Digital Group Monitor (GM) Function

The digital GM function automatically checks whether members registered in a group are within communication range, and displays information such as distance and direction for each call sign on the screen. This convenient function makes it possible not only to see whether any friends are in communication range, but also to instantaneously determine the location and relationship between all members of the group. This function can also be used to send messages and data such as images between members of a group, permitting convenient and fun communication between friends when out for a drive or hike. Sent and received messages and images can be checked on the LOG List screen, with icons making them easy to distinguish.

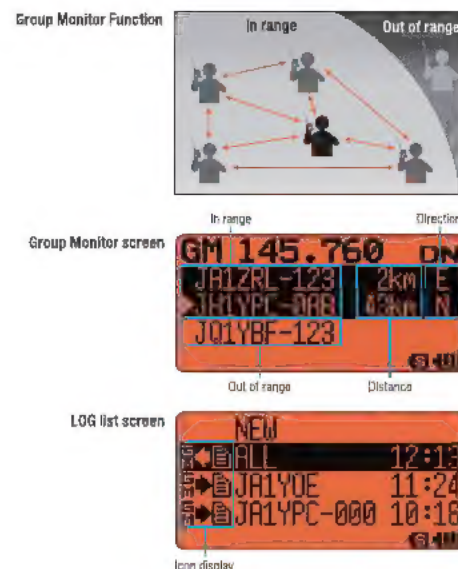

Snapshot Function

When using the handy speaker microphone camera (optional MH-85A11U), press the shutter button to capture a snapshot, then press the image transmit button to easily transmit the image data. The snapshot image or received data is stored in a high capacity micro SD card that is installed in the radio. You can recall and send that image data from the SD card anytime. The image data size is 320 x 240 dots or 160 x 120 dots. Image quality can set from 3 types, and you can choose a format that is suitable for the image and purpose.

This image data also retains a time record and the GPS location data of the snapshot. It is easy to view and edit the data file after taking the pictures by using a personal computer. A snapshot aids in navigating and returning to the pictured location, other various uses are possible.




Lens

Image transmission button Shutter button

Smart Navigation Function

A real-time navigation function that records the location and direction of Group Monitor (GM) stations. Digital V/D Mode communicates information such as position data at the same time as the voice signal, allowing you to view the distance and direction of the other party in real time while communicating. This makes it possible to confirm your position and the other party's in situations such as hiking and driving where your positions are constantly changing, providing an easy way to meet up or join routes.



Backtrack Function to Return to Departure Point
This function allows navigation back to the departure point, or a point previously added to the memory.

When hiking or camping, just register the starting point or the position of your tent and then you can constantly check the direction and distance from your current position. The arrow of the compass display constantly shows the direction to the registered point, making it extremely convenient in finding your way back to the registered place — just move in the direction so that the arrow in the heading-up display points straight upward.



Registered points (★, L1 or L2)

Extremely user-friendly with intuitive and easy-to-master operations

The FT1DR/FT1DE is extremely user-friendly, with a wide range of functions that can be called up directly. An easy-to-understand hierarchical menu is also used for the setting modes that allows customization of the FT1DR/FT1DE and makes it convenient to use. Press the ENT key to move to a lower level of the hierarchy, press the DISP key to return to a higher level, and turn the dial to select items or set values. These simple operations can be used to adapt the FT1DR/FT1DE to many communication situations.

Wideband Receive capability

Covers 504 kHz~999.900 MHz (A Band), 108MHz~580MHz(B Band), continuous reception for short-wave, FM/AM broadcasts, aircraft, public service channels, etc.

Real Dual Band Operation (V+V/U+U/V+U)

With two independent receivers, you may listen to either the same or a different band simultaneously.

Preset Receiver Function with an Extensive Range of Major Broadcasting Stations and Various Wireless Information Services

The FT1DR/FT1DE has a preset receiver function with various frequencies in memories, making it easy to call up stations in the various communication services. The frequencies include short-wave broadcasts, international (marine) VHF and NOAA Weather channels.

1200/9600bps APRS® Data communication


The built-in worldwide standard AX.25 Data TNC Modem permits uncomplicated APRS® (Automatic Packet Reporting System) operation.

You will be able to display the information, station list; and use the message, SmartBeaconing™ function. You will be able to track your APRS® movement on the Internet websites.

APRS® Display FT1DR/E displays the positions, heading directions of the station, distances, icons (45 kinds), weather information, object, etc.



APRS® List The station List function stores up to 60 stations with the individual APRS® data



AF Dual

Listen to AM or FM radio stations while monitoring two frequency channels! Two independent receivers will allow you to listen to your favorite AM or FM broadcast station, and monitor two different bands ("Band A" and "Band B") at the same time.

Micro SD card slot

The micro SD card slot is provided on the side of the radio. Memory back-up, the picture image data and other useful information is stored on the high capacity micro SD card (Maximum 32GB).

The GPS logger records the location and track information of your moving station, which may be shown later by using Map software on your personal computer. By using the SD card, it is also possible to clone the radio data to the other compatible radios.



Built-in GPS Antenna on the top



Water Protection-IPX5 Rating

Fully ruggedized and water protected (IPX5) design. Perfect for extreme environments, field and outdoor use.

High Power and long life Operation

Up to 5 watts of power output and rugged compact body. 4 steps of power output, 5 watts, 2.5 watts, 1 watt and 0.1 watt. There are two types of Li-Ion battery. The optional FNB-102LI battery will provide up to 8 hours of typical 5 watt operation.

Battery Operating Times (Approximately)

Band · Mode		FNB-101LI	FNB-102LI	Battery Case FBA-39(0.8Wh)
144MHz	Analog Mode	5 hours	8 hours	16.5 hours
	Digital Mode	4 hours	6.5 hours	11 hours
430MHz	Analog Mode	4.5 hours	7.5 hours	15 hours
	Digital Mode	3.6 hours	6.0 hours	10.5 hours

* Duty Cycle based on Tx 6 sec., Rx 6 sec., Standby 48 sec.

(1 Tx Power 5 Watts, Rx audio output 10% THD, Battery save 1/s, Monoband receive, and GPS function off.)

* Operating times may vary depending on operating conditions.

Many additional features

- Large-capacity 1266 ch memory
- Fully illuminated keyboard
- High resolution band-scope
- Vibrate Alert function
- Memory TAG up to 16 characters
- High-Intensity White LED
- Internal Bar Antenna
- DTMF Memory
- 24-hour Clock

50/144/430 MHz FM TRIPLE BAND HANDHELD 144/430 MHz FM DUAL BAND HANDHELD

VX-8DR VX-8DE

VX-8GR VX-8GE

New Advanced VX-8 GPS/APRS® Handheld



6 m/2 m/70 cm (220 MHz/USA Version)
Tri-Band FM Handheld
Heavy Duty: IPX7 Waterproof Rating
Bluetooth® Capabilities (optional)
Wideband Receive:
504 kHz to 999.990 MHz
The optional GPS Antenna Unit FGPS-2

The optional GPS antenna may be attached to the radio microphone input jack using the GT-136 adapter. Or it may be mounted on the MH-74A7A Speaker Microphone.



2 m/70 cm Dual Band FM Handheld
Waterproof IPX5 Rating
Built-in GPS antenna and Data terminal
Wideband Receive:
108 MHz to 999.990 MHz

**Heavy Duty, Tough and rugged
ready for your field operation!**

VX-8DR/VX-8DE

Waterproof/Submersible IPX 7 rated – 3 ft (1m) for 30 minutes

VX-8GR/VX-8GE

Fully ruggedized and waterproof (IPX5) design –
Perfect for extreme sports and outdoor use

VX-8DR/VX-8DE | VX-8GR/VX-8GE

**Ultra-Rugged Polycarbonate Resin Front
panel with Aluminum die-cast chassis**



The tough compact case combines a rugged die-cast chassis with the clean and tough polycarbonate resin front panel. Its high shock proof versatility will allow you to operate the radio in the toughest environments!

VX-8DR/VX-8DE | VX-8GR/VX-8GE

**Enjoy 5 W high power and long hours
of operation!** [The optional cell Holder FBA-39 permits
operation with 3 AA batteries.]

You will enjoy up to 5 hours operation on 144/430 MHz with the supplied FNB-101LI Lithium-ion battery. The optional FNB-102LI High Capacity Lithium-ion Battery will provide up to 8.5 hours on 144 MHz, and 8 hours on 430 MHz.

Approximate Battery Operating Time
(VX-8DR/VX-8DE on one band with no optional items)

Operating Band	Battery Life (Approx.)		
	FNB-101LI	FNB-102LI	FBA-39
50 MHz	5.5 hours	9.0 hours	20 hours
144 MHz	5.0 hours	8.5 hours	17 hours
222 MHz (USA version)	6.0 hours	11 hours	20 hours
430 MHz	5.0 hours	8.0 hours	16 hours
Broadcast Band	13 hours	20 hours	20 hours

Also VX-8GR/VX-8GE on 2 m/70 cm Band.
* Reference only. May vary depending on environmental temperature, humidity, etc.
* TX (5 W) 6 sec./RX 6 sec., and squelched 48 sec.

VX-8DR/VX-8DE | VX-8GR/VX-8GE

**Real dual Ham Band Operation
[V+V/U+U/V+U]**

With two completely independent Amateur Radio Band Receivers, you can listen to either the same or a different band simultaneously.



50/144/430 MHz (220 MHz)
Triple Band 5W FM Transceiver
(50 MHz AM: 1 W, 220 MHz FM: 1.5 W (USA version only))

VX-8DR
American and Asian versions
VX-8DE
European version

(7.4 V 1100 mAh Lithium Ion battery FNB-101LI and battery charger PA-48 / PA-44 (European Version) included)

144/430 MHz
Dual Band 5W FM Transceiver

VX-8GR
American and Asian versions
VX-8GE
European version

(7.4 V 1100 mAh Lithium Ion battery FNB-101LI and battery charger PA-48 / PA-44 (European Version) included)

Series

Transceivers...Choose one that matches your style!

Wideband Receive* Capability

VX-8DR/VX-8DE

504 kHz - 999.900 MHz (A Band) Continuous reception for short-wave, FM/AM broadcasts, analog TV station audio, aircraft, public service channels, etc.

VX-8GR/VX-8GE

108 MHz - 999.900 MHz (A Band) In addition to Amateur Radio bands, aircraft, public service channels, etc.


*(USA Cellular blocked)

VX-8DR/VX-8DE | VX-8GR/VX-8GE


The large LCD display provides clear and easy-to-read indication

The large LCD Display shows everything needed for your advanced operations, including the main and sub band frequencies, operating mode and S-meters. A high resolution Spectrum Analyzer with ± 50 channels indication permits wave monitoring of the received signal modulation! It is very easy to scroll through the set menu items to check the previous settings and make new selections as well.

*Audio scope can be displayed on the VX-8DR only.



*Audio Scope (VX-8DR/E)



*Spectrum Analyzer

Optional GPS Operation

VX-8DR/VX-8DE

The optional 12 channel GPS Receiver Antenna Unit (FGPS-2) provides GPS data. Your exact current position, moving speed, altitude, etc. may be displayed and transmitted on APRS. The FGPS-2 can be directly attached to the radio using the microphone input jack. Alternately the GPS antenna can be attached to the optional MH-74 A7A speaker/microphone.



VX-8GR/VX-8GE

Take full advantage of the VX-8GR/VX-8GE GPS functions with its built-in GPS unit/antenna.

(The optional GPS unit/antenna is not required.) (The photo is for illustration only)



VX-8DR/VX-8DE | VX-8GR/VX-8GE

Independent A and B Band Keys with TX/Busy Indication


VX-8DR/VX-8DE

Bluetooth® Capabilities [Optional Bluetooth unit required]

VX-8DR/VX-8DE

Dual Band AF DUAL monitor Function

You can listen to the AM or FM broadcast radio while monitoring two HAM frequency channels! When the radio receives a signal on either the "A" or the "B" Amateur Band, it will mute the FM/AM broadcast and switch operation to the Amateur Band that the VX-8DR/VX-8DE is receiving.



APRS® 1200/9600 bps data communication [B band only] using the worldwide standard AX25 Data TNC Modem

The built-in AX25 Data TNC Modem permits uncomplicated APRS® (Automatic Packet/Position Reporting System) operation. The VX-8DR/8GR supports APRS 1200/9600 bps data communication (B band only). You may communicate your location to other APRS stations with the position, speed and heading displayed on your radio!

●APRS® Station Display


When you receive signals and information from other APRS® stations, the radio displays message positions, hearing directions, message icons (46 kinds), weather information, object, etc.



Position/Distance/Direction of the APRS® Station Picked up from the list

●APRS® Station List Function


The list function stores up to 50 stations.




APRS® Station List

●APRS® Message Memories

The radio stores up to 30 messages automatically with the individual APRS® data, and you may recall them later!



List of Incoming/Outgoing messages from/to other APRS® stations



Display your message with up to 67 characters.

●SmartBeaconing™ Function

●DIGI-PATH route indication function

VX-8GR/VX-8GE

Vibrate Alert Function when a message is received

Huge 1,830 ch (VX-8DR/VX-8DE) / 1,327ch (VX-8GR/VX-8GE) memory channel management capability!

Many additional features to support active outdoor operations!

- CW Training feature, Emergency Automatic ID system and Emergency Strobe/Beep and Busy strobe LED functions
- Messaging Feature (compatible with VX-3R/E and FTM-10R/SR series) messaging feature with your TX station ID (up to 16 characters x 20 different messages)
- Built-in CTCSS/DCS encode/decode enables selective call features for the A and the B Band individually.
- Enhanced Paging Code Squelch functions are available to place a call to an individual member of your group.
- Various timer functions
- Easy access to WIRES-II Internet Linking System with the WIRES-II Access DTMF memory function
- Useful and convenient battery saving features.
- Yaesu's original "Auto-Range Transponding System" (ARTS) which provides audio and/or visual confirmation that another ARTS-equipped station is within communication range
- VOX function (VX-8DR/VX-8DE)
- Built-in Barometric Pressure and Temperature Sensor (VX-8DR/VX-8DE)
- Internal Bar Antenna for better AM Broadcast Band reception (VX-8DR/VX-8DE)
- External Data Jack for other data communications (VX-8GR/VX-8GE)
- Sub Band operating system (VX-8GR/VX-8GE)

APRS® is a registered trademark of APRS Software and Bob Bruninga, WB4APR. SmartBeaconing™ from HamHUD Nicheltronix

144/430MHz FM DUAL BAND HANDHELD

VX-6R VX-6E

Ultra-rugged, Submersible Dual Band Handie



**144 MHz/430 MHz
Dual Band 5W FM Transceiver**
(220 MHz FM: 1.5 W (USA version Only))

VX-6R

American and Asian versions

VX-6E

European version

(7.4 V 1250 mAh¹ Lithium Ion battery FNB-80LI
and battery charger PA-48 included)

¹ Indicated Battery capacity based on EU DIRECTIVE 2006/66/EC

Outdoor-ready Features including Waterproof Rating!

Compact Polycarbonate Resin and Aluminum Die-Cast Case with Solid Waterproofing Seal

The VX-6R/VX-6E is rated to IPX7 specifications for submersion (up to 30 minutes at a depth of up to three feet), and because the microphone jack is sealed against water ingress, you can even use the MH-73A4B Speaker-Microphone while maintaining the submergibility of the VX-6R/VX-6E!



Five Watts of Power Output, using High-Capacity Lithium-Ion Battery (supplied)

The supplied FNB-80LI (7.4 V / 1250 mAh) provides up to 5 Watts of power output on both the 144 and 430 MHz bands. This high battery capacity provides a typical operating time of 7 hours, depending on operating conditions.

Direct Memory Recall feature provides One-Touch Stored Frequencies Access, just like on a Car Stereo!



Full keyboard operation is powerful, but in an emergency it can seem confusing.

The VX-6R/VX-6E, though, adopts a one-touch DMR (Direct Memory Recall) system operating just like your car stereo does. Just tune to a frequency, press a numerical key for about two seconds to store the frequency, and then just touch that key to recall the stored frequency instantly!

Wide-band Receiver Coverage for Catching All the Action!

In addition to full operation on the 144 and 430 MHz Amateur bands, the VX-6R/VX-6E provides a wide range of monitoring excitement, thanks to its receiver's incredible frequency coverage of 504 kHz to 998.99 MHz. We recommend the use of an

external antenna for best performance on particular bands of interest, such as Shortwave. Cellular coverage is blocked and non-restorable.

EAI Feature: Ideal for Outdoor Operation!

The EAI feature lets you and your support team configure your EAI equipped radios so that, in the event of a climbing or hiking accident that leaves one of you incapacitated, someone else can command your VX-6R/VX-6E to transmit without you pressing the PTT, allowing the others to use your signal to perform direction finding and effect a rescue.

Performance Features for the Experienced Hand-Held User!

- Channel counter function for determining the frequency of a nearby station
- Smart Search automatic 31-channel scanning/loading system
- 10 dB Attenuator for use in strong-signal environments
- Time-Out Timer (TOT) that will disengage transmission after programmed time interval (to prevent interference to others caused by accidental "stuck microphone" condition)
- Busy Channel Lockout (BCLO) feature prevents transmission when the current frequency is in use
- RF Squelch keeps receiver muted until a signal exceeding a certain S-meter reading is received
- 16-digit, 10-memory DTMF Autodialer for Autopatch use
- Automatic Repeater Shift (ARS)
- Opening "Splash Screen" message is programmable
- Wide range of available options
- Microphone Gain adjustment
- Key Beep level adjustment
- CW Training feature that can send five-character Morse Code groups, to help you improve your code proficiency.

Power Output/Power Source Chart (Approximately)

	HIGH	LOW3	LOW2	LOW1
FNB-80LI or EXT DC (1) 220 MHz/USA Version	5 W (1.5 W)	2.5 W (1.0 W)	1.0 W (0.5 W)	0.05 W (0.2 W)
FBA-23 2 "AA" Alkalines	0.3 W		0.05 W	

Battery Operating Times (Approximately)

Band	FNB-80LI	Battery Case
144 MHz	7 hours	6.5 hours
430 MHz		6 hours
Receive Only		15 hours

Note:

Operating times may vary depending on operating conditions, and are based on a duty cycle of 6 seconds of transmission at 5 Watts, 6 seconds of reception at 50% audio level, and 48 seconds of standby operation.

144/430 MHz FM DUAL BAND HANDHELD

VX-3R VX-3E

Ultra-compact Handheld FM Transceiver



ULTRA COMPACT
144 MHz/430 MHz
Dual Band FM Transceiver

VX-3R
American and Asian versions

VX-3E
European version

(3.7 V 1100 mAh Lithium Ion battery FNB-82LI
and battery charger PA-46 included)

20 hours of continuous reception with high-capacity Lithium-ion Battery (supplied)

The VX-3R/VX-3E comes with the FNB-82LI, high capacity, super-thin and tiny Lithium-ion Battery, and 2.5 hour charger. You may enjoy up to 6 hours of Amateur Band operation, or more than 20 hours listening to your favorite AM or FM broadcast stations using the supplied high-performance Lithium-ion battery.

Power Output/Power Source Chart (Approximately)

	HI	Low
FNB-82LI	1.5 W (UHF 1 W)	0.1 W
FBA-37 3 "AA" Alkalines	1.5 W (UHF 1 W)	0.1 W
External DC (6 V)	3 W (UHF 2 W)	0.1 W

Battery Operating Time (Approximately)

VX-3R/VX-3E provides 1.5 Watts of power output on the 144 MHz, and 1.0 Watt on 430 MHz Amateur bands. Low power of 0.1 watt may be selected, for optimum battery life.

Battery Operating Time (Approximately)

Band	FNB-82LI	"AA" Battery operation
Amateur Band	144 MHz	About 6.0 hours
	430 MHz	About 7.0 hours
AM Broadcast/Short-wave Broadcast/FM Stereo Broadcast reception (Piscose Only)		About 6.5 hours
		About 7.5 hours
		About 20 hours
		About 25 hours

Note: Operating times may vary depending on operating conditions, and are based on a duty cycle of 6 seconds of transmission at 1.5 watts, 6 seconds of reception at 50% audio level, and 46 sec of stand by operation.

Ultra-Compact and Light Weight !!

As tiny in your palm as the legendary VX-1R/E. Only 1.9" x 3.2" x 0.9". The high capacity FNB-82LI Lithium-Ion battery provides 1.5 watts (70cm: 1 W) output power!

Use convenient replaceable AA batteries with the optional FBA-37 Battery Case.

3 W Output with External DC (70 cm : 2 W)

The optional DC Cable with Cigarette-Lighter Adapter enables you to operate the VX-3R/VX-3E at full power output (3 W / 2 m : 2 W / 70 cm) while charging the battery at the same time !

Mechanical Dial Lock function

The Mechanical Dial Lock makes it very easy, and secure, to lock or unlock the main dial. Just pull the knob up, then turn it to adjust the frequency. Push the knob down to Lock it. Take your radio anywhere you want to go, in your briefcase or in your shirt pocket!



Huge 1286-Channel Memory Capacity

AF DUAL FUNCTION

Sub RX (AF-Dual) Function allows you to listen to your favorite AM / FM stereo broadcast stations and monitor the Amateur Band at the same time

Note : Sub RX (AF Dual) function works only on the AM and FM broadcast bands.

Wide-band Receiver Coverage

The VX-3R/VX-3E has incredible frequency coverage of 1.8 - 76 MHz and 108 - 999.9 MHz*, in addition, it has a totally separate and independent AM / FM Stereo Broadcast receiver inside.

(*Cellular coverage is blocked and not restorable)

Separate Earphone Jack for FM Stereo Broadcast Reception

You may enjoy your favorite FM broadcast station in stereo with your stereo headset or earphone! The connected headset/ earphone cable works as an antenna to receive FM broadcast signals.



Internal Bar Antenna for AM Broadcast Band

The VX-3R/VX-3E has an internal bar antenna to provide good reception on the AM broadcast band.



(Not actual : Cut-out image photo)

Yaesu's Original Emergency Feature

The VX-3R/VX-3E has the Emergency Automatic ID (EAI) feature which is also included in the FT-60R/E and the VX-6R/E. The EAI feature lets you and your support team configure your radios so that, in case of an accident or emergency that leaves one of your team incapacitated, someone else can command their radio to transmit without their pressing the PTT, allowing others to use the signal for direction finding and effect a rescue.

Note : This EAI function shall only be used in case of emergency or accident to support direction finding and rescue. Yaesu, shall not be responsible for any direct or indirect results caused by using the EAI function.

Other Useful Features

- Various scanning functions •WiRES-II Internet Key
- DTMF Operation •Frequency Counter Operation (to measure the frequency of a nearby transmitter, without knowing the frequency in advance.)
- Smart Search Operation (automatically find and load, up to 31 Smart Memory Channels where activity is encountered)
- CW Learning and Training feature
- ARTS™ (Automatic Range Transponder System) that lets you know whether you and another ARTS™-equipped station are within communication range.
- DW (Dual Receive) function to monitor a designated frequency every 5 seconds
- RF Squelch that allows you to set the squelch to open only for signals exceeding a desired S-meter level
- CTCSS/DCS Bell Operation •Automatic power-on function •Automatic Power-Off (APO) feature
- Time-Out Timer (TOT) •Busy Channel Lock-Out (BCLO) •Mic gain adjustment •ATT •Cloning feature

144/430 MHz FM DUAL BAND HANDHELD

FT-60R FT-60E

The New Generation Dual Band Handheld



144/430 MHz
Dual Band 5W FM Transceiver

FT-60R

American and Asian versions

FT-60E

European version

(7.2V 1400 mAh Ni-MH battery FNB-83 and battery charger PA-48 or PA-44 (European Version) included)

144 / 430 MHz DUAL BAND HANDHELD WITH WIDEBAND RECEIVER COVERAGE

The FT-60R/FT-60E's small size allows you to take it anywhere – hiking, skiing, or while walking around town – and its operating flexibility brings the user many avenues of operating enjoyment. FNB-83 Rechargeable Nickel-Metal Hydride Battery Pack provides up to 5 Watts of transmit power on the 144 MHz and 430 MHz Amateur Bands.

HIGH POWER OUTPUT: 5 W

The FT-60R/FT-60E's powerful transmitter puts out a full five Watts of power on both the 144 and 430 MHz bands. For longer battery life, reduced power settings of 2 Watts and 0.5 Watt are provided, along with a Transmit Battery Saver (TBS), that automatically lowers power when you utilize a strong local repeater.

Pwr. Source	TX PO	HI	MID	LOW
FNB-83 FBA-25A Ext. DC		5.0W	2.0W	0.5W

Battery Life

Battery	FNB-83 / FBA-25A
Band	
144 MHz	Approx. 9 Hr. ¹
430 MHz	Approx. 8 Hr. ¹
Receiving	Approx. 15 Hr. ²

¹ Duty Cycle based on 5W PO, 6 sec. TX, 5 sec. RX w/audio, and 48 sec. Rx squelched.

² Using FNB-83, Audio Volume set to 50%.

Available as an option for the FT-60R/FT-60E is the FBA-25A Alkaline Battery Tray, which allows you to use "AA" Alkaline cells to power your FT-60R to a full 5 Watts of TX power.

EMERGENCY AUTOMATIC ID SYSTEM

The Emergency Automatic ID (EAI) Feature can be used for searching for persons who are incapacitated in disasters like earthquakes, especially search-and-rescue personnel who may need assistance. An EAI-equipped searcher sends out a unique command (CTCSS tone pair), and the radio of the incapacitated party, who may not be able to speak or even press the PTT, will automatically be placed in the transmit mode, so others may perform direction finding and effect a rescue. The callsign of the incapacitated person will also be transmitted, to assist the rescue team.

Note : This EAI function shall only be used in case of emergency or accident to support performing direction finding and rescue. YAESU shall not be responsible for any direct or indirect results caused by using the EAI function.

WIDE BAND RECEIVER COVERAGE

144 / 430 MHz Dual Band Handheld with wide band reception

108-520 MHz / 700 – 999.990 MHz (Cellular Blocked*) US Version


(*Cellular coverage is blocked and not restorable)

OVER 1000 MEMORY CHANNELS

The FT-60R/FT-60E's unmatched memory capabilities include 1000 Standard memory channels, five Home channels, 50 sets of band-edge memories, and ten "Weather Broadcast" channels.

TWO PROGRAMMABLE KEYS

Two of the keys on the front panel's keyboard may be assigned with user-defined functions from the configuration Menu, so as to provide quick access to special setup options you use frequently. Menu access was never easier!



ONE-TOUCH NOAA WX BAND ACCESS

*US Version

The FT-60R/FT-60E provides a dedicated memory bank for reception of NOAA Weather broadcasts. Pressing the PTT switch activates scanning of the Weather memories, and another press of PTT will halt the scan.

NOAA SEVERE WEATHER ALERT WITH ALERT SCAN

You can also command the FT-60R/FT-60E to scan for an incoming "Severe Weather" alert tone from NOAA, to advise you of an impending severe storm.

SINGLE-BAND AND MEMORY- ONLY OPERATING MODES

For the ultimate in operating simplicity, at those times when you need it, the FT-60R/FT-60E offers capability for single-band (144 MHz or 430 MHz only) or Memory-channel-only operating configurations. These may be particularly useful during search-and-rescue or public service operations, when a new user may need to be trained quickly for use of the FT-60R/FT-60E.

AND MUCH MUCH MORE . . .

- NINE DTMF AUTO-DIALER MEMORIES
- VFO, Memory, and Band-Segment Scanning
- Dual Watch Scanning with Priority Revert
- Direct Keypad Frequency Entry
- Battery Voltage Meter
- Smart Search Automatic Memory Loading
- Automatic Repeater Shift
- Automatic Power-Off (APO) Battery Saver
- Busy Channel Lock-Out (BCLO)
- 1750 Hz Tone Calling for European Repeater Access

144MHz SINGLE BAND FM HANDHELD

FT-270R FT-270E

Commercial Grade Field Radio Submersible Construction



The FT-270R/FT-270E is a compact, high-performance FM hand-held providing up to five Watts of RF power, along with big audio output (800 mW) for the 2 m amateur bands. Protected against water ingress to IPX7 specifications (submersion for up to 3 feet/1 meter for 30 minutes), the FT-270R/FT-270E features long operating time, thanks to the supplied 1400 mAh Ni-MH Battery Pack. This 16-key versatile handheld includes direct keypad frequency entry and direct DTMF input and provides quick one-touch access to YAESU's exciting and fun WIRES-II™ VoIP Internet Linking system!

- **Large Backlit LCD Display for easy operation**
- **5 Watts of Stable RF Power**
- **800 mW of Loud Audio for noisy field operations**
- **200 Memory Channels for serious users**
- **Commercial Grade Performance**
- **Submersible Construction IPX7 (3 ft./1 meter for 30 min)**
- **Yaesu's Exclusive Power Saving Circuit Design Guarantees Longer Operating time**
- **Hands Free Operation with Optional VC-24 VOX Headset**

Main Features

- 200 Memory Channels with Alpha-numeric tags (maximum 6 characters)
- Ten Memory banks for Channel allocation
- High Power Output: 5 Watts (FNB-83 or FBA-25A with dry batteries)
- Loud 800 mW Audio output
- Long life FNB-83 (7.2 V/ 1400 mAh) and Overnight Charger included
- Emergency Automatic ID (EAI) function (US Version)
- Enhanced Paging and Code Squelch (EPCS)
- Password Protection
- CTCSS and DCS Encode/Decode, with split Tone and DCS Encode-only capability
- Scanning Mode: VFO / Memory / PMS / Dual Watch
- Nine DTMF Auto-dialer memories
- Keypad/Dial Lockout capability
- Two front panel programmable keys
- Convenient Access key for the Yaesu's WIRES™ (Wide-coverage Internet Repeater Enhancement System)
- RF squelch
- Memory-only operating mode available for easy operation
- Rugged case construction and Submersible (IPX7, 3 ft / 1 meter 30 minutes)
- Huge LCD Display
- Smart Search to easily select active channels
- Battery Voltage Display
- Adjustable TX Deviation Level (5 kHz or 2.5 kHz)
- Transmit Time-Out-Timer (TOT) and Automatic Power-Off (APO)
- Busy Channel Lock-Out (BCLO)
- Automatic Repeater Shift (ARS)
- ARTS™ (Auto-range Transponding System) which "beeps" the user when you move out of communication range

144 MHz Single Band 5W FM Transceiver

FT-270R

American and Asian versions

FT-270E

European version

(7.2V 1400 mAh Ni-MH battery FNB-83
and battery charger PA-48 included)

144MHz SINGLE BAND FM HANDHELD

FT-250R FT-250E

Compact Field Radio with Top Mounted LCD and Loud Audio

Compact yet incredibly rugged, the FT-250R/FT-250E 2-meter handheld is designed to perform under the most difficult operating conditions. It is packed with the leading-edge features you've come to expect from a Yaesu product. The FT-250R/FT-250E's die-cast aluminum case houses a large, high-output speaker, and the illuminated keypad provides easy viewing during night time operation.

- **Compact Design with Top mounted LCD Display**
- **5 Watts of Stable RF Power**
- **700 mW of Loud Audio for outside field environments**
- **209 Memory Channels for serious users**
- **Yaesu's Exclusive Power Saving Circuit Design Guarantees Longer Operating time**
- **Hands Free Operation with Optional VC-25 VOX Headset**



144MHz Single Band
5W FM Transceiver

FT-250R

American and Asian versions

FT-250E

European version

(7.2 V 1400 mAh Ni-MH battery FNB-83
and battery charger PA-43 included)

Main Features

- 209 Memory Channels with Alpha-numeric tags (maximum 7 characters)
- Direct Keypad Frequency Entry
- High Power Output: 5 Watts (FNB-83)
- Loud 700 mW Audio output
- Long life FNB-83 (7.2 V/ 1400 mAh) and Desktop Charger included
- CTCSS and DCS Encode/Decode, with split Tone and DCS Encode-only capability
- Scanning Mode: VFO / Memory / PMS / Dual Watch
- Nine DTMF Auto-dialer memories
- Keypad/Dial Lockout capability
- Two front panel programmable keys
- TX and RX Battery Saver settings
- Convenient Access key for the Yaesu's WIRES™
(Wide-coverage Internet Repeater Enhancement System)
- RF squelch
- Memory-only operating mode available for easy operation
- Rugged and Water resistant case construction
- Smart Search to easily select active channels
- Battery Voltage Display
- Adjustable TX Deviation Level (5 kHz or 2.5 kHz)
- Transmit Time-Out-Timer (TOT) and Automatic Power-Off (APO)
- Busy Channel Lock-Out (BCLO)
- Automatic Repeater Shift (ARS)
- ARTS™ (Auto-range Transponding System) which "beeps" the user when you move out of communication range

144MHz SINGLE BAND FM HANDHELD

430MHz SINGLE BAND FM HANDHELD

FT-252

FT-252E

FT-257

Compact and High Performance

The FT 252/FT 252E and FT 257 are compact, simple to operate handheld radios that providing up to 5 Watts of RF power, along with loud audio output (800 mW) for the 2 m or 70 cm amateur bands. The FT 252/FT 252E and FT 257 ruggedly constructed water resistant bodies are sealed tight to meet IPX5 protection requirements. They are packed with popular and valuable features demanded by Amateur Radio operators around the world, including 200 memory channels with 10 flexible memory banks, CTCSS/DCS encode/decode, Multiple scanning modes, Dual watch, Automatic Repeater Shift, and ATS(Automatic Transponder System)

- New Ergonomic design and Large Backlit LCD Display for better operation
- 5 Watts of Stable RF Power
- 800 mW of Loud Audio for noisy field operations
- ATS (Automatic Transponder System) "beeps" when moving out of communication range
- 200 Memory Channels for Serious users
- Water Protection - IPX5 Rating

Main Features

- High Power Output: 5 Watts (FNB 124L)
- Loud 800 mW Audio output
- ATS (Automatic Transponder System) "beeps" when you move out of communication range
- 200 Memory Channels with Alpha numeric tags (maximum 6 characters)
- 10 Memory banks for Channel allocation
- Emergency Operation (Alarm, Flash, Morse Code Message)
- NOAA Weather channels and Weather Alert (FT 252 only)
- Password Protection
- CTCSS (50 tones) and DCS (104 codes) Encode/Decode, with Split Tone and DCS Encode only capability
- Scanning Mode: VFO / Memory / PMS / Dual Watch
- Nine DTMF Auto dialer memories
- Keypad/Dial/PTT Lockout capability
- RF squelch
- Memory only operating mode available for easy operation
- Rugged case construction and Submersible (Water Protection - IPX5 Rating)
- Smart Search to easily select active channels
- Battery Voltage Display
- Adjustable TX Deviation Level (5 kHz or 2.5 kHz)
- Transmit Time Out Timer (TOT) and Automatic Power Off (APO)
- Busy Channel Lock Out (BCLO)
- Automatic Repeater Shift (ARS)



144MHz Single Band 5W FM Transceiver

FT-252

American and Asian versions

FT-252E

European version

(7.4V 1030 mAh Lithium-ion Battery FNB 124L and battery charger PA 48 / SAD 11B (USA version) included)

430MHz Single Band 5W FM Transceiver

FT-257

(American and Asian versions only)

COMMUNICATIONS RECEIVER

VR-160



AM/FM/WFM 100 kHz ~ 1299.990 MHz
Wide Band Receiver


VR-160

(European and Asian versions only)

(3.7 V 1100 mAh Lithium Ion battery FNB-82LI and battery charger PA-46 included)

This new miniature receiver has a new AF DUAL function for listening to FM/AM broadcast while monitoring your priority channel

- Wide frequency coverage 100 kHz to 1299.990 MHz
- The Sub RX function (AF-Dual) allows you to listen to your favorite FM/AM broadcast and monitor other communications simultaneously
- Huge 1821 Memory Channels Capacity. Also 10 weather broadcast frequencies, 57 VHF Marine frequencies and 89 popular shortwave broadcast stations are pre-programmed at factory
- Internal ferrite bar antenna provides good reception on the AM broadcast band
- The earphone connector allows you to enjoy FM broadcasts in stereo. Also your connected headset/earphone cable works as a FM aerial
- New mechanical Dial lock makes it very easy and secure to lock or unlock the main dial. Just pull up to use and push down to activate lock function. No more accidental frequency change



Battery operating time (Approximately)

Band	FNB-82L	"AA" Battery Operation
Amateur Band	About 23 hours	About 28 hours
AM/FM Broadcast, short wave TV	About 20 hours	About 25 hours

Note: Operating times may vary depending on operating conditions, and are based on a duty cycle of (Amateur Band) 1:3 (Receive: Standby)
(Other Band) Continuous reception at VOL 10 position (factory default position)

COMMUNICATIONS RECEIVER

VR-120D



AM/FM/WFM 100 kHz ~ 1299.990 MHz
Wide Band Receiver

VR-120D

(European and Asian versions only)

Rugged Professional Communications Receiver

- WIDEBAND FREQUENCY COVERAGE WITH EASY ACCESS!
The VR 120D provides continuous coverage of the frequency range 0.1~1299.995 MHz (cellular frequencies are blocked and non-restorable). When you set a frequency, the operating mode (AM/FM/Wide FM) and channel steps appropriate for that frequency range are automatically selected, for ease in tuning around in search of other stations. Of course, you can manually select the mode and tuning steps, if you have other requirements in that tuning range.
- ULTRA LONG BATTERY LIFE AND EXT DC INPUT
When you're out in the field, and can't afford to miss out on weather information, long battery life in your receiver is essential. The VR 120D, especially designed for low current consumption, can provide up to 20 hours of operation on a pair of "AA" alkaline cells (at 40 mW audio output), and the Battery Saver feature cuts battery consumption dramatically when no signals are being received. An icon on the LCD indicates when the batteries are getting low, alerting you to the need to replace them.
- VERSATILE 640 CHANNEL MEMORY SYSTEM!
The VR 120D includes a versatile 640 channel Memory system which allows partitioning of the channels into ten "Banks" of 64 channels each. You can group shortwave broadcast, FM broadcast, Public Safety, and Amateur Radio channels separately, for maximum tuning convenience!
- STRAIGHTFORWARD 4-BUTTON OPERATION
The no-nonsense front panel of the VR-120D contains four large keys which are used for command of the receiver's many operating functions. These keys, the "Function" key on the side, and the Main Tuning Knob are all you need to tune in on the DX action! The display and function keys are fully illuminated, for ease of operation at night.
- WIDE SELECTION OF SCANNING MODES!
Efficient scanning is the key to any receiver's performance, and the VR 120D is a champion when it comes to scanning! A special "Search Band Scanning" function assigns seven memory channels as scanning limits, and for skipping particular frequencies a 64 channel "Skip" memory bank lets you tune past stations you don't need to monitor. Among the Memory Scan features are: Full Memory Scan, Memory Bank Scan, Selected Memory Channel ("Preferential") Scan, Programmable Band Limit Memory Scan (PMS), Smart Search™ (Automatic Memory Loading), Priority Channel Watch and Dual Watch.



Accessories & Options

Handheld Transceivers		FT10R FT10E	VX 8DR VX-8DE	VX 8GR VX-8GE	VX 6R VX-6E	VX 3R VX-3E	FT 60R FT-60E	FT 270R FT-270E	FT 250R FT-250E	FT 252 FT 252E FT 257	VR 160	VR 120D
PROGRAMMING KIT												
ADM5	Windows™ PC Programming Kit		ADM5-S-VX8	ADM5-S-VX8G	ADM5-VX6	ADM5-VX3	ADM5-FT60	ADM5-FT270	ADM5-FT250		ADM5-VR160	
SOFT CASE												
CSC	Soft Vinyl Case	CSC-87	CSC-83	CSC-85	CSC-84	CSC-82					CSC-82	CSC-86
MICROPHONE/HEADSET												
MH-34B4B	Compact Speaker / Microphone	•		•		•	•		•			
MH-37A4B	Compact Lapel Mic with Earpiece	•		•		•	•		•			
MH-57A4B	Compact Speaker / Microphone				•			•				
MH-73A4B	Waterproof Speaker / Microphone				•			•				
MH-74A7A	Waterproof Speaker / Microphone		•									
MH-85A11U	Speaker Microphone with Snapshot camera	•										
VC-24	Lightweight VOX (Voice-Operated) Headset				•			•				
VC-25	Lightweight VOX (Voice-Operated) Headset	•		•		•	•		•			
VC-27	Earpiece Microphone				•			•				
Bluetooth® OPTIONS												
BH-2A	Bluetooth® Handset		•									
BU-2	Bluetooth® Adapter Unit		•									
GPS OPTIONS												
FGPS-2	GPS Antenna Unit		•									
GT-136	GPS Antenna Adapter for FGPS-2		•									
CABLES & ADAPTERS												
E-DC-21	DC Cable with Voltage Regulator and Cigarette-Lighter Plug					•					•	•
E-DC-5B	DC Cable with Cigarette-Lighter Plug	•	•	•	•		•	•	•			
E-DC-6	DC Cable (Plug and Wire Only)	•	•	•	•		•	•	•	•		
SDD-11	DC Cable with Cigarette-Lighter Adapter									•		
CN-3	Adapter for use with BNC Connector	•	•	•	•	•	•	•	•	•	•	
CT-27	Radio to Radio Cloning Cable					•	•					
CT-35	Cloning Cable											•
CT-44	For packet interface or use with earlier Yaesu MIC	•		•		•	•		•			
CT-91	Microphone Adapter				•			•				
CT-144	Cloning Cable (2.5 a- 2.5 a)			•								
CT-143	Data Cable (2.5 a- Dsub 9 PIN)			•								
CT-134	Cloning Cable		•									
CT-131	Microphone Adapter		•									
CT-168	Clone Cable	•										
CT-170	Data Cable	•										
CT-176	Data Cable(2.5p)	•										
SCU-18	PC Connection Cable	•										
BATTERY PACK & BATTERY TRAY												
Battery TRAY	Alkaline Cells Battery Tray	FBA-39(3xAA)	FBA-39(3xAA)	FBA-39(3xAA)	FBA-23(2xAA)	FBA-37(3xAA)	FBA-25A(6xAA)	FBA-25A(6xAA)	FBA-25A(6xAA)		FBA-37(3xAA)	
FNB-79MH	Ni-MH Battery Pack (2.4 V, 1200 mAh)											•
FNB-83	Ni-MH Battery Pack (7.2 V, 1400 mAh)						•	•	•			
FNB-80L ^{1,2}	Lithium-Ion Battery Pack (7.4 V, 1250 mAh)				•							
FNB-82L	Lithium-Ion Battery Pack (3.7 V, 1100 mAh)					•					•	
FNB-101LI	Lithium-Ion Battery Pack (7.4 V, 1100 mAh)	•	•	•								
FNB-102LI	Lithium-Ion Battery Pack (7.4 V, 1800 mAh)	•	•	•								
FNB-124LI	Lithium-Ion Battery Pack (7.4 V, 1030 mAh)									•		
BATTERY CHARGERS												
CD-15A	Rapid Charger (2.5 hours)				•							
CD-26	Charger Cradle							•				
CD-40	Charger Cradle (3 hours) for BR-1A/BR-2A Bluetooth® Headset		•									
CD-41	Rapid Charger (2.5 hours)	•	•	•								
CD-47	Desktop Rapid Charger (4 hours) Requires PA-43B/C/U							•	•			
CD-57	Charger Cradle									•		
SBH-13 ³	Desktop Rapid Charger (4 hours) Requires PA-48B/C/U						•					
NC-82	Charger Stand for CA-34											•
CA-34	Charger Sleeve for NC-82											•
VAC-370B/C ¹	Rapid Charger (1.5 hours)						•					
PA-43B/C/F/U ¹	AC Adapter for CD-47								•			
PA-44B/C/U ^{1,4}	AC Adapter		•	•			•	•				
PA-46B/C/U ¹	AC Adapter					•					•	•
PA-48B/C/F/U ¹	AC Adapter	•	•	•	•		•	•		•		
SAD-11B ³	AC Adapter	•								•		
OTHS												
SU-1	Barometric Pressure Sensor				•							
FTD-7	DTMF Paging Unit							•				

¹ "B" for 120 VAC "C" for 220-240 VAC. "F" for 220 VAC. "U" for 220-240 VAC w/UK plug
² Indicated Battery Capacity based on EU DIRECTIVE 2006/68/EC

³ JSA version only
⁴ European version only

Handheld Transceivers & Receivers Specifications

[illegible]

[illegible]

29/50/144/430 MHz FM QUAD BAND MOBILE

FT-8900R

Ruggedly-built, High quality 29/50/144/430 MHz Quad Band FM Transceiver FT-8900R

INDEPENDENT TWO-CHANNEL, DUAL RECEIVE AND FULL DUPLEX OPERATION

Basically operating as two radios in one, the FT-8900R may be configured in a number of ways. For example, you can set up the "left" side of the rig for operation on 29, 50, 144, or 430 MHz operation, while setting the "right" side to 430 MHz. Or set up the left side on 29/50/144/430 MHz, and the right side on 144 MHz. And, if you like, you can configure your FT-8900R for 144-144 MHz or 430-430 MHz dual receive operation, so you never miss out on the action! The left and right sides have their own Volume and Squelch controls, as well as S-meters, so your operating preferences are never compromised.




QUAD BAND OPERATION

The FT-8900R combines the "traditional" 144/430 MHz local communications concept with the exciting capability of Sporadic E or F2 DX on the 29 MHz and 50 MHz bands, for nationwide or worldwide FM communications from your car! The first Amateur Radio FM mobile transceiver providing this capability, the FT-8900R will make you wonder how you got by with a two-band transceiver until now.

HIGH POWER OUTPUT

To get your message through when it counts, the FT-8900R puts out a full 50 Watts of power on the 29/50/144 MHz bands, and 35 Watts on the 430 MHz band.

To ensure thermal stability during long transmissions, a thermal sensor monitors heat sink temperature, engaging the rear panel's cooling fan when needed.



HIGH	MID1	MID2	LOW
50W/35W(430MHz)	20W	10W	5W



OVER 800 MEMORY CHANNELS

The FT-8900R provides a wide variety of memory resources, including 799 "regular" memories, six "Home" channels for favorite frequencies, five sets of band-edge memories, and six "Hyper Memory" memories, which store complete transceiver operating status for maximum operating efficiency and convenience.

ONE-TOUCH BAND-PATTERN "HYPER MEMORY" FEATURE

To save valuable time while operating a transceiver with the versatility of the FT-8900R, the "Hyper Memory" feature allows you to store a complete set of configuration data for the two bands on which you're operating. Besides the usual storage of frequency and tone data, Hyper Memory will store such setup parameters as Automatic Repeater Shift status, Packet parameters, Scanning mode, and VFO tracking, avoiding the need to change each of these functions manually on a regular basis.



Automatic Repeater Shift (ARS)

BUILT-IN DUPLEXER

Utilizing a single antenna jack, the FT-8900R's leading edge design includes a high performance duplexing system, with extensive filtering to allow cross-band full duplex operation.

CONVENIENT REMOTE-HEAD MOUNTING CAPABILITY

CROSS-BAND REPEAT CAPABILITY

For emergency work, or to extend the range of a handheld unit, the FT-8900R includes Cross-Band Repeat capability.

CONVENIENT ACCESS TO WIRES™ AND OTHER INTERNET-LINKING SYSTEMS

50-TONE CTCSS/104-TONE DCS (DIGITAL CODE SQUELCH) TONE SYSTEMS

USER-PROGRAMMABLE MICROPHONE KEYS

EASY SETUP FOR FM SATELLITE OPERATION

AND MUCH, MUCH MORE!

- 1200/9600 BPS Packet Capability: Connect your TNC using the optional CT-39A Packet Cable
- RF Squelch: Opens the squelch at a user-defined S-Meter level
- Automatic Power-Off (APO)
- Time-Out Timer (TOT)
- Battery Voltage Meter
- DTMF Auto-Dial Memory: 16 Memories of up to 16 tones each
- Lock Feature for Front Panel Keys & PTT Switch: Prevents accidental transmission or frequency change

29/50/144/430 MHz 50 W/35 W (430 MHz)
FM Quad Band Transceiver

FT-8900R

American, Asian and European versions

144/430 MHz FM DUAL BAND TRANSCEIVER

FT-8800R FT-8800E

Easy Operation with The Ultimate Dual-Band Mobile

INDEPENDENT TWO-CHANNEL OPERATION

The FT-8800R/FT-8800E operates as two radios in one, with either 144 MHz or 430 MHz as the "Main" TX/RX band, with simultaneous monitoring of the other band. Each band has its own Volume and Squelch controls, and you can configure your FT-8800R/FT-8800E for VHF-VHF or UHF-UHF operation, too!



WIDE FREQUENCY COVERAGE

The FT-8800R/FT-8800E provides extended receiver coverage beyond the Amateur bands, so you can keep informed of communications activities in the public safety, commercial, aircraft, and government communications ranges.

HIGH POWER OUTPUT

To get your message through when it counts, the FT-8800R/FT-8800E puts out a full 50 Watts of power on the 144 MHz band, and 35 Watts on the 430 MHz band. A thermal sensor monitors heat sink temperature, engaging the rear panel's cooling fan only when needed.



HGH	MID1	MID2	LOW
50W/35W(430MHz)	20W	10W	5W

OVER 1000 MEMORY CHANNELS

The FT-8800R/FT-8800E provides a wide variety of memory resources, including 512 "regular" memories, Five "Home" channels for favorite frequencies, Ten sets of band edge memories, and ten memory banks on both the Main and Sub bands, as well as six "Hyper Memories" which store complete sets of transceiver operating status.



144/430 MHz 50 W/35 W (430 MHz)
FM Dual Band Transceiver

FT-8800R

American and Asian versions

FT-8800E

European version



VERSATILE SCANNING CAPABILITY

The FT-8800R/FT-8800E lets you scan the memories, the entire operating band, or a portion of the band. The transceiver will stop on signals encountered during the scan, resuming the scan after a time delay or after the carrier drops out. During band scanning, you may configure the FT-8800R/FT-8800E to remain within the current band, or hop to the other band, once the band edge is reached. Dual frequency "Priority Channel" operation is also provided. And the Programmable Memory Scan feature allows you to set up sub-band limits, so you won't waste time scanning or tuning in the SSB/CW portions of the bands.

ONE-TOUCH BAND-PATTERN "HYPER MEMORY" FEATURE

To save valuable time when operating a transceiver with the capability of the FT-8800R/FT-8800E, the "Hyper Memory" feature allows you to store a complete set of configuration data for the two bands on which you're operating. Hyper Memory will store not only frequency and tone data, but also Automatic Repeater Shift status, Packet parameters, Scanning mode, and VFO tracking configuration.



CROSS-BAND REPEAT CAPABILITY

For emergency work, or to extend the range of a handheld unit, the FT-8800R/FT-8800E includes Cross-Band Repeat capability.

50-TONE CTCSS/104-TONE DCS (DIGITAL CODE SQUELCH) TONE SYSTEMS

Providing excellent performance even under difficult link conditions, Yaesu's 50-tone sub-audible CTCSS and 104-tone DCS signaling systems ensure that you have full access to repeater and remote-base inputs, and the built-in CTCSS/DCS decoders allow silent listening on busy channels. Plus you get Tone Search Scanning, which will scan for the tone being received on an incoming signal, allowing you to match tones quickly when operating on a new repeater system.

USER-PROGRAMMABLE MICROPHONE KEYS

Four programmable keys on the microphone allow you one-touch access to your favorite command functions. The commands available from the microphone replicate the corresponding front panel key functions, and include Band Change, VFO/Memory switching, Home Channel access, 1 MHz frequency steps, Power Output selection, Repeater Reverse, and CTCSS/DCS setup.

CONVENIENT REMOTE-HEAD MOUNTING CAPABILITY

AND MUCH, MUCH MORE!

- Convenient Access to WIRELESS™ and Other Internet Linking Systems
- 1200/9600 bps Packet Capability
- Automatic Repeater Shift: Automatically sets the repeater shift within the designated repeater sub-bands
- RF Squelch: Opens the squelch at a user-defined S-Meter level
- Automatic Power Off (APO): Turns radio off after long periods of inactivity
- Time-Out Timer (TOT): Prevents "Stuck Microphone" from causing lengthy QRM to others
- Battery Voltage Meter: Lets you know if your battery is getting low
- DTMF Auto-Dial Memory: 16 Memories of up to 16 tones each
- Lock Feature for Front Panel Keys & PTT Switch: Prevents accidental transmission or frequency change
- Built-in Duplexer

144/430 MHz FM DUAL BAND TRANSCEIVER

FT-7900R FT-7900E

**Heavy-Duty FM Dual Band Mobile
with Exceptionally Wide Receiver Coverage**

- Large Backlit LCD Display for easy operation
- Stable RF Power (50 Watts VHF / 45 Watts UHF)
- Reliable performance in harsh environments
- 5 ppm Frequency Stability (+14° F to +140° F / -10° C to +60° C)
- 1000 Memory Channels for serious users
- Yaesu Unique Power Saving Circuit Design
Minimizes Vehicle Battery Drain



Get "Back to Basics" with YAESU's economically priced One-Touch Operation FT-7900R/FT-7900E Dual Band FM Mobile. Back-lit push button controls ensure extraordinarily easy and safe operation while driving at night. The exceptionally wide receiver coverage provides all sorts of additional uses!

Main Features

- One-Touch Hyper Memories Feature
- High Power Output,
(50 Watts on VHF, 45 Watts on UHF)
- 4 power output levels: HIGH (50/45 watts),
MID2 (20 watts), MID1 (10 watts), LOW (5 watts)
- Wide Frequency Coverage
TX: 144 - 148 (146) MHz and 430 - 450 (440) MHz
RX: 108 - 520 MHz, 700 - 999.990 MHz (Cellular Blocked)
- Remote Front Panel Design (Optional YSK-7800 Required)
- The liquid crystal display indicates operating frequency,
status of functions, apha-numeric memory labels
- 1000 memory channels with 20 Memory Groups
- 50-Tone CTCSS, 104-Tone DCS Tone System
- 16 DTMF memories can store 16 digits each for quick
payback of commonly used numbers
- Scanning Function: VFO Scan, Memory Channel Scan,
Programmable Memory Scan and Priority Scan
- The Smart Search feature, which automatically sweeps a
band and loads active frequencies into dedicated memory
banks, is ideal for identifying
active repeaters when visiting a city for the first time
- 1200 or 9600 bps Packet Operation
- Internet Connecting: WIRES™ (Wide-Coverage Internet
Repeater Enhancement System)
- ARTS™ (Auto-Range Transponder System)
- ARS (Automatic Repeater Shift)
- APO (Automatic Power Off)
- TOT (Transmitter Time-Out Timer)
- Radio to Radio Cloning

144/430 MHz 50 W / 45 W (430 MHz)
FM Dual Band Transceiver

FT-7900R

American and Asian versions

FT-7900E

European version

HEAVY-DUTY 144 MHz 75 W FM TRANSCEIVER

FT-2900R FT-2900E

The King of Mobile

- **Massive Heatsink** guarantees 75 Watts of Solid RF Power with No Cooling Fan Needed
- **Loud 3 Watts** of Audio Output for noisy environments
- **Large 6 Digit Backlit LCD** for excellent visibility
- **Alpha-Numeric Channel Display**
- **200 Memory Channels** for serious users



Yaesu's FT-2900R/FT-2900E, the most ruggedly-built 2-meter amateur transceiver ever, provides 75 Watts of power along with Yaesu's renowned "bullet-proof" receiver front end. Direct keypad frequency entry, Alpha-Numeric Memory System, high power output, and unsurpassed ergonomics make the FT-2900R/FT-2900E an operator's dream come true!

Main Features

- Massive Heatsink guarantees 75 Watts of Solid RF Power with No Cooling Fan Needed
- Loud 3 Watts of Audio Output for noisy environments
- Large 6 Digit Backlit LCD for excellent visibility
- 200 Memory Channels for serious users
- Alpha numeric Channel Display
- CTCSS and DCS Encode/Decode Built In
- Versatile Scanning Capability
- WX Channels with "Severe Weather" Alert (US Version)
- Smart Search™
- WiRES™ Internet Linking Access Feature
- MH 48A6JA DTMF Direct Access Microphone
- Excellent Receiver Performance
- Wide/Narrow Deviation Selection
- RF Level Squelch
- Interactive Programming Menu
- Supply Voltage Display
- Transmit Time Out Timer (TOT)
- Automatic Power Off (APO)
- Automatic Repeater Shift (ARS)
- 4 level Display Dimmer
- Dual Watch

144 MHz 75 W
FM Transceiver

FT-2900R

American and Asian versions

FT-2900E

European version

144MHz 55 W FM TRANSCEIVER

430MHz 55 W FM TRANSCEIVER

FT-1900R

FT-1900E

FT-1907R

**Best Selling,
Reliable Mobile**

- 55 Watts of Solid RF Power within a compact footprint
- Loud 3 Watts of Audio Output Power for noisy environments
- Large 6 Digit Backlit LCD for excellent visibility
- Alpha-Numeric Channel Display
- 200 Memory Channels for serious users



The ruggedly built yet compact new FT 1900R/FT 1900E /FT 1907R FM Transceiver brings you Yaesu's legendary mechanical toughness along with outstanding receiver performance and 55 watts with crisp, clean audio that will get your message through!

144 MHz 55 W
FM Transceiver

FT-1900R

American and Asian versions

FT-1900E

European version

430 MHz 55 W
FM Transceiver

FT-1907R

(Asian version only)

Main Features

- 200 Regular Memory Channels with Alpha numeric tags (maximum 6 characters)
- Eight Memory banks for Channel allocation (You can assign a name to each bank)
- 55 Watts RF Power Output
- Loud 3 Watts of Audio Output Power with internal Speaker
- CTCSS (50 tones) and DCS (104 codes) Encode/Decode, with split Tone and DCS Encode-only capability
- RF Squelch
- Automatic Repeater Shift
- Separate Transmit Frequency Memories ("Odd Splits")
- Tone Search Scanning
- EPCS (Enhanced Paging & Code Squelch) Operation
- CTCSS/DCS/EPCS Beep Operation
- DCS Code Inversion
- Split Tone Operation
- DTMF Auto dialer (10 channel) Operation
- DC Voltage indication feature
- Memory-Only Mode
- Password function
- Scan feature: Preferential Memory Scan, Programmable memory scan, VFO scan, Priority Channel Scanning (Dual Watch), Memory Bank Link Scan and Weather Alert Scan (USA version only)
- Convenient Access key for Yaesu's WIRES (Wide-coverage Internet Repeater Enhancement System)
- Programmable Key Assignments (4 keys)
- RF squelch (only pass signals exceeding the programmed level)
- Weather Broadcast Reception (USA version only)
- Severe Weather Alert Feature (USA version only)
- ARTS™
- CW Training
- Smart Search Operation
- Time-Out Timer (TOT)
- Automatic Power Off (APO)
- Busy Channel Lock Out (BCLO)
- Adjustable TX Deviation Level
- Cloning

Accessories & Options

Mobile Transceivers		FT-8900R	FT-8800R FT-8800E	FT-7900R FT-7900E	FT-2900R FT-2900E	FT-1900R FT-1900E	FT-1907R
MICROPHONES/SPEAKER							
MH-42 _{B6JS}	Hand Microphone with 1750 Hz Burst Button	● ^{*1}	●	●	●	●	●
MH-48 _{A6JA}	DTMF Microphone	● ^{*2}	● ^{*3}	● ^{*3}	● ^{*3}	● ^{*3}	● ^{*3}
MLS-100	High-Power External Speaker	●	●	●	●	●	●
BRACKET							
MMB-60	Quick Release Mobile Mounting Bracket	●	●	●			
CABLES							
YSK-8900	Separation Kit	●	●				
YSK-7800	Separation Kit			●			
CT-39A	Packet Interface Cable	●	●	●			
PROGRAMMING KIT							
ADMS-2H	Windows™ PC Programming Kit	●					
ADMS-2I	Windows™ PC Programming Kit		●				
ADMS-1900	Windows™ PC Programming Kit					●	
ADMS-1907	Windows™ PC Programming Kit						●
ADMS-2900	Windows™ PC Programming Kit				●		
ADMS-7900	Windows™ PC Programming Kit			●			
OTHERS							
MEK-2	Mic Extension Kit (For use with Yaesu 8-pin Microphones)	●	●	●			
FP-1030A	AC Power Supply (25 A)	●	●	●	●	●	●
FP-1023	AC Power Supply (23 A) USA version only	●	●	●	●	●	●

*1 (Included) European and Asian versions

*2 (Included) USA version

*3 (Included) American, European and Asian versions

Mobile Transceiver Specifications

	FT-8900R	FT-8800R FT-8800E		FT-7900R FT-7900E	
General					
Frequency Ranges	RX:	FT-8800R	FT-8800E	FT-7900R	FT-7900E
	28 - 29.7 MHz	RX:	RX:	RX:	RX:
	50 - 54 MHz	108 - 520 MHz	108 - 520 MHz	108 - 520 MHz	108 - 520 MHz
	108 - 180 MHz	700 - 999 MHz	700 - 999 MHz	700 - 999 MHz	700 - 999 MHz
	320 - 480 MHz	USA Version		USA Version	
	700 - 985 MHz	Cellular Blocked		Cellular Blocked	
	USA Version Cellular Blocked	TX:	TX:	TX:	TX:
		144 - 148 MHz	144 - 146 MHz	144 - 148 MHz	144 - 146 MHz
	TX:	430 - 450 MHz	430 - 440 MHz	430 - 450 MHz	430 - 440 MHz
	28 - 29.7 MHz				
50 - 54 MHz					
144 - 148 MHz or 144 - 146 MHz					
430 - 450 MHz or 430 - 440 MHz					
Channel Steps	5, 10, 12.5, 15, 20, 25, 50 kHz	5, 10, 12.5, 15, 20, 25, 50 kHz		5, 10, 12.5, 15, 20, 25, 50, 100 kHz	
Frequency Stability	±5 ppm (+14°F to +140°F, -10°C to +60°C)	±5 ppm (+14°F to +140°F, -10°C to +60°C)		±5 ppm (+14°F to +140°F, -10°C to +60°C)	
Supply Voltage	Nominal 13.8 V DC, Negative Ground Operating 11.7 - 15.8 V DC, Negative Ground	Nominal 13.8 V DC, Negative Ground Operating 11.7 - 15.8 V DC, Negative Ground		Nominal 13.8 V DC, Negative Ground Operating 11.7 - 15.8 V DC, Negative Ground	
Current Consumption	0.8 A (Receive) 8 A (TX, 50/430 MHz) 8.5 A (TX, 29/144 MHz)	0.5 A (Receive) 8.5 A (TX, 144 MHz 50 W) 8 A (TX, 430 MHz 35 W)		0.5 A (Receive) 8.5 A (TX, 144 MHz 50 W) 9 A (TX, 430 MHz 45 W)	
Operating Temperature	-4°F to +140°F, -20°C to +60°C	-4°F to +140°F, -20°C to +60°C		-4°F to +140°F, -20°C to +60°C	
Case Size (WxHxD)	5.5" x 1.6" x 6.6" (140 x 41.5 x 168 mm) (W/O knob & connectors)	5.5" x 1.6" x 6.6" (140 x 41.5 x 168 mm) (W/O knob & connectors)		5.5" x 1.6" x 6.6" (140 x 41.5 x 168 mm) (W/O knob & connectors)	
Weight	2.2 lbs (1 kg)	2.2 lbs (1 kg)		2.2 lbs (1 kg)	
Transmitter					
RF Power Output	50 / 20 / 10 / 5 W (29/50/144 MHz) 35 / 20 / 10 / 5 W (430 MHz)	50 / 20 / 10 / 5 W (144 MHz) 35 / 20 / 10 / 5 W (430 MHz)		50 / 20 / 10 / 5 W (144 MHz) 45 / 20 / 10 / 5 W (430 MHz)	
Spurious Emission	At least 60 dB below (29MHz : At least 50 dB below)	At least 60 dB below		At least 60 dB below	
Microphone Impedance	2 kΩ	2 kΩ		2 kΩ	
Receiver					
Sensitivity	0.2 μV for 12 dB SINAD	0.2 μV for 12 dB SINAD		0.2 μV for 12 dB SINAD	
Selectivity	12 kHz / 30 kHz (-6 dB / -60 dB)	12 kHz / 30 kHz (-6 dB / -60 dB)		12 kHz / 30 kHz (-6 dB / -60 dB)	
AF Output	2 W @ 8 Ω for 5 % THD (@ 13.8 V)	2 W @ 8 Ω for 5 % THD (@ 13.8 V)		2 W @ 8 Ω for 5 % THD (@ 13.8 V)	

Mobile Transceiver Specifications

	FT-2900R FT-2900E		FT-1900R FT-1900E		FT-1907R
General					
Frequency Ranges	FT-2900R	FT-2900E	FT-1900R	FT-1900E	
	RX:	RX:	RX:	RX:	RX:
	136 - 174 MHz	144 - 146 MHz	136 - 174 MHz	144 - 146 MHz	400 - 470 MHz
	TX:	TX:	TX:	TX:	TX:
	144 - 148 MHz	144 - 146 MHz	144 - 148 MHz	144 - 146 MHz	400 - 470 MHz

YAESU



2013.0412SS(U/EXP/EU) B9200637A Printed in Japan

YAESU MUSEN CO., LTD. <http://www.yaesu.com/jp>

Tennozu Parkside Building
2-5-8 Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-0002, Japan

YAESU USA <http://www.yaesu.com>

US Headquarters 6125 Phyllis Drive, Cypress, CA 90630, U.S.A.

YAESU UK <http://www.yaesu.co.uk>

Unit 12, Sun Valley Business Park, Winnall Close
Winchester, Hampshire, SO23 0LB, U.K.

YAESU HK <http://www.yaesu.com.hk>

Unit 2002, 20/F, 9 Chong Yip Street,
Kwun Tong, Kowloon, Hong Kong